




SOLON Allegro

Off-grid sine wave inverter.

- › Pure sine wave
- › Short circuit and overload security
- › High efficiency factor
- › Galvanic isolation

SOLON Allegro

Off-grid application

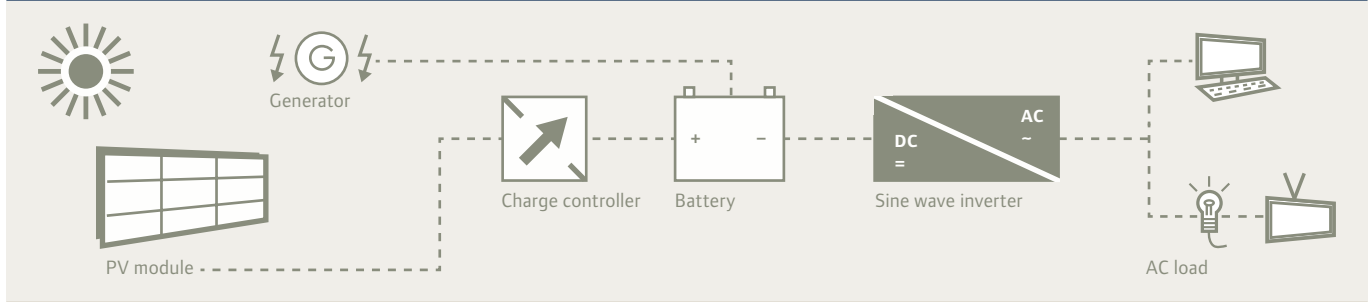

Input variables (DC)		08/12	10/24	10/48
Rated voltage DC	$U_{DC IN}$	12 V	24 V	48 V
Input voltage range	U_{DC}	10,5 – 16,0 V_{DC}	21,0 – 32,0 V_{DC}	42,0 – 64,0 V_{DC}
Dynamic low voltage cut (depending on load)	U_{DC}	10,5 – 9,0 V_{DC}	21,0 – 18,0 V_{DC}	42,0 – 36,0 V_{DC}
Rated current DC	$I_{DC IN}$	78 A	50 A	25 A
Max. current	$I_{DC max}$	250 A	160 A	80 A

Output variables (AC)

Rated output current AC	$I_{AC OUT}$	3,5 A	4,2 A	4,2 A
Short circuit current (max. 0.5 s)	$I_{AC K}$	8 A	11 A	11 A
Continuous power	P_{AC}	850 VA	1,000 VA	1,000 VA
Rated power (10 min at $T_A = 20^\circ C$)	P_{10}	1,100 VA	1,300 VA	1,300 VA
Rated power (30 min at $T_A = 20^\circ C$)	P_{30}	950 VA	1,200 VA	1,200 VA
Rated output voltage AC (short circuit proof)	$U_{AC OUT}$	230 $V_{AC} \pm 2\%$	230 $V_{AC} \pm 2\%$	230 $V_{AC} \pm 2\%$
Output frequency (pure sine wave)	f_{AC}	50 Hz $\pm 0,5\%$	50 Hz $\pm 0,5\%$	50 Hz $\pm 0,5\%$
Power factor	$\cos\Phi$	0,3 – 1,0	0,3 – 1,0	0,3 – 1,0

Typical data

Dimensions (L x W x H)	360 x 210 x 120 mm	360 x 210 x 120 mm	360 x 210 x 120 mm
Weight	10 kg	11 kg	11 kg
Efficiency factor max.	94%	94%	94%
Consumption 230 V_{AC} OK	8 W	10 W	10 W
DC breaker	100 A	80 A	32 A
Remote control ON/OFF	via RS 232	via RS 232	via RS 232

Housing protection	IP 20
Status indication	LED RS 232
Reset after short circuit	Every 60 s
Reset after overload	Every 60 s
Reset after overtemperature	Automatically after reaching semiconductor temp. $45^\circ C$
Reset after battery failure	Automatically after reaching $U_{DC IN}$

Ambient temperature range	$-25^\circ C$ to $+50^\circ C$ (max. 95% rH, non-condensing)
Consumption standby / OFF	ca. 0.5 W (testpulse 800 ms)/0 W
Toroidal transformer	Galvanically isolated EN61558 (ICE61558)
Temperature and load controlled fan	ON $55^\circ C$ /OFF $45^\circ C$, $P_D > 80 W$
Warranty	2 years
Certificate	Declaration of conformity



SOLON Inverters AG
Bürgerfeldstrasse 19
8730 Uznach/SG · Switzerland

Phone +41 55 24641-14
Fax +41 55 24641-16
E-Mail inverters@solon.com

SOLON SE
Am Studio 16
12489 Berlin · Germany

Phone +49 30 81879-0
Fax +49 30 81879-9999
E-Mail components@solon.com

SOLON S.p.A.
Via dell'Industria e dell'Artigianato 2
35010 Carmignano di Brenta PD · Italy

Phone +39 049 9458200
Fax +39 049 9458299
E-Mail solon.it@solon.com

Your specialty retailer

For more information on SOLON products visit us on www.solon.com.